

MS302

E-3 / G-3 / L-3

The aggressive, self-cleaning tread design provides excellent traction and floatation in articulated dump truck and loader applications.


- Wear & Cut resistant tread compound
- Self-cleaning tread
- Low rolling resistance
- Long life
- Excellent traction & floatation
- Reduced vibration & improved stability



Applications



Footprint

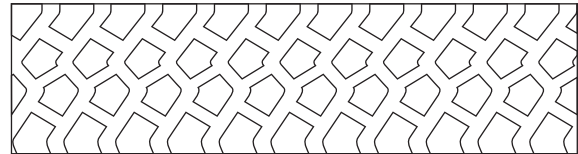

Size	Load Index & Speed Symbol	Star Rating	Type	Rim	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
23.5R25	185B / 170A8 / 201A2	**	TL	19.50/2.5	in.	48/32	23.6	63.5
					mm	38	599	1613
26.5R25	193B / 209A2	**	TL	22.00/3.0	in.	52/32	26.5	68.6
					mm	41	672	1742
29.5R25	200B / 216A2	**	TL	25.00/3.5	in.	54/32	30.0	74.5
					mm	43	763	1893