

# MS501

## **MINEXTRA**

### L-5

The extra deep L5 tread design provides excellent traction in tough and demanding applications.


- Wear & Cut resistant tread compound
- Good balance between tread protection and sufficient traction
- Extra deep L5 traction pattern
- Long life
- Excellent traction & flotation
- Reduced vibration & improved stability



#### Applications



#### Footprint

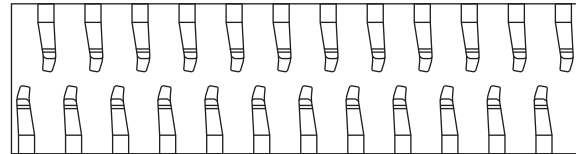

Size	Load Index & Speed Symbol	Star Rating	Type	Rim	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
17.5R25	182A2	**	TL	14.00/1.5	in.	83/32	17.5	54.9
					mm	66	445	1395
20.5R25	193A2	**	TL	17.00/2.0	in.	90/32	20.9	60.9
					mm	72	531	1548
23.5R25	201A2	**	TL	19.50/2.5	in.	98/32	23.8	65.6
					mm	78	605	1665
26.5R25	209A2	**	TL	22.00/3.0	in.	110/32	26.9	70.6
					mm	87	684	1794
29.5R25	216A2	**	TL	25.00/3.5	in.	118/32	30.6	75.6
					mm	94	777	1920
29.5R29	218A2	**	TL	25.00/3.5	in.	125/32	31.5	79.1
					mm	99	800	2010
35/65R33	223A2	**	TL	28.00/3.5	in.	120/32	36.0	82.1
					mm	95	914	2085