

# MS902

## Backhoe Industrial Service

The aggressive, self-cleaning, flat tread provides high traction, excellent stability and durability in tough & demanding applications.


- Excellent grip
- Wear & cut resistant tread compound
- Specially designed domed mud breakers for optimum self-cleaning
- Reduced vibration & increased stability
- Deep under tread for improved puncture resistance
- Protected sidewall for increased cut resistance



### Applications



### Footprint

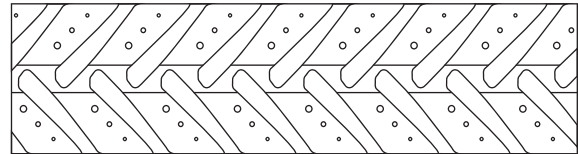

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
15.5/80-24 (400/80-24)	12	TL	13.00	154A8	in.	35/32	15.5	50.0
					mm	28	394	1270
15.5/80-24 (400/80-24)	14	TL	13.00	156A8	in.	35/32	15.5	50.0
					mm	28	394	1270
15.5/80-24 (400/80-24)	16	TL	13.00	159A8	in.	35/32	15.5	50.0
					mm	28	394	1270
15.5/80-24 (400/80-24)	-	TL	13.00	163A8	in.	35/32	15.5	50.0
					mm	28	394	1270
16.5/85-24	12	TL	13.00	150A8 DRIVE 162A8 FREE	in.	35/32	16.4	52.0
					mm	28	417	1322
16.5/85-24	14	TL	13.00	153A8 DRIVE 165A8 FREE	in.	35/32	16.4	52.0
					mm	28	417	1322
16.5/85-24	16	TL	13.00	156A8 DRIVE 168A8 FREE	in.	35/32	16.4	52.0
					mm	28	417	1322