

MS904

Backhoe Industrial Service

The aggressive, self-cleaning, flat tread provides high traction, excellent stability and durability in tough & demanding applications.


- Excellent grip
- Wear & cut resistant tread compound
- Specially designed domed mud breakers for optimum self-cleaning
- Reduced vibration & increased stability
- Deep under tread for improved puncture resistance
- Protected sidewall for increased cut resistance



Applications



Footprint

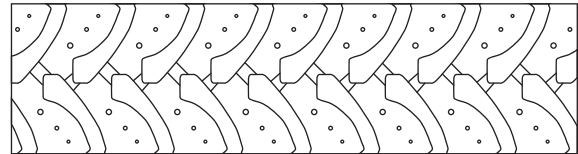

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
17.5L-24 (460/70-24)	10	TL	W15L	144A8	in.	33/32	17.5	48.8
					mm	26	445	1241
17.5L-24 (460/70-24)	12	TL	W15L	149A8	in.	33/32	17.5	48.8
					mm	26	445	1241
17.5L-24 (460/70-24)	16	TL	W15L	156A8	in.	33/32	17.5	48.8
					mm	26	445	1241
19.5L-24 (500/70-24)	12	TL	W16L	151A8	in.	34/32	19.5	51.7
					mm	27	495	1314
19.5L-24 (500/70-24)	16	TL	W16L	157A8	in.	34/32	19.5	51.7
					mm	27	495	1314