

MS907

Skid Steer & Backhoe

The ultra-deep non directional tread design & reinforced construction provides optimum performances and durability for equipment working in the toughest of applications.


- Ultra wear & cut resistant tread compound
- Self-cleaning, non-directional tread design with mud breakers
- Increased stability and stiffness
- Reinforced construction with high ply rating
- Excellent traction with the deep L5 pattern
- Extraordinary puncture resistance



Applications



Footprint

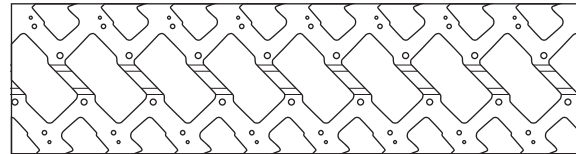

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
23x8.50-12	8	TL	7JA	107A2	in.	35/32	8.4	22.6
					mm	28	213	574
27x8.50-15	10	TL	7JA	122A2	in.	38/32	8.7	27.0
					mm	30	221	686
10-16.5	14	TL	8.25	128A2	in.	44/32	10.9	31.3
					mm	35	278	795
12-16.5	14	TL	9.75	147A2	in.	44/32	13.0	33.1
					mm	35	330	842
14-17.5	16	TL	10.50	157A2	in.	46/32	14.1	36.8
					mm	36	357	935
12.5/80-18	14	TL	11.00	145A8	in.	47/32	12.0	38.0
					mm	37	306	965
12.5/80-18	16	TL	11.00	148A8	in.	47/32	12.0	38.0
					mm	37	306	965
16.9-28	14	TL	W15L	155A8	in.	48/32	17.7	55.5
					mm	38	450	1410