

MS908

Wheel Excavator

The aggressive, full size, self-cleaning tread provides high traction, excellent stability and durability in tough & demanding applications.


- Full size, flat profile for increased flotation
- Wear & cut resistant tread compound
- Specially designed domed mud breakers for enhanced self-cleaning
- Excellent grip and increased traction
- Deep & under tread for improved puncture resistance
- Protected sidewall for increased cut resistance and enhanced stability



Applications



Footprint

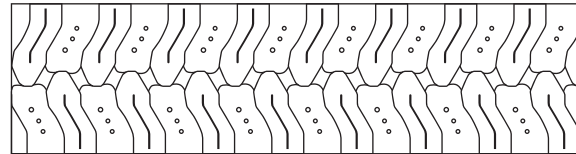

Size	PR	Type	Rim	LI / SR	Unit	Tire Dimensions		
						Tread Depth	Section Width	Overall Diameter
10.00-20	16	TT	7.50	148B	in.	26/32	10.8	41.4
					mm	21	275	1052