

MS701

Solid Tires - Industrial PRO

Premium, three compound solid resilient tire, incorporates a full sized wide flat profile, reinforced shoulder and multi-layer construction for optimum lifetime, stability, comfort and durability.


- Three-Compound
- Wear & Cut resistant tread compound
- Smooth Running
- Excellent Traction
- Low rolling resistance
- Heat resistant tread compound
- Available in both marking and non-marking



Applications



Footprint

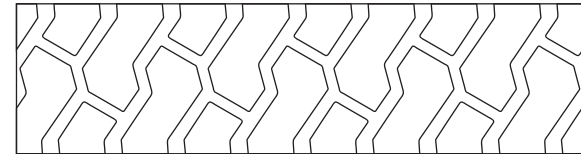

Size	Rim	Type		Load Capacity (kg) Forklift up to 25 km/h		Unit	Tire Dimensions		
		Standard	Swift	Load Wheels	Steer Wheels		Tread Depth	Section Width	Overall Diameter
4.00-8	3.00D	*	*	950	730	in.	24/32	4.1	16.1
						mm	19	103	410
5.00-8	3.00D	*	*	1415	1090	in.	25/32	4.8	17.7
						mm	20	122	450
15x4.5-8 (125/75-8)	3.00D	*	*	1040	800	in.	20/32	4.5	14.8
						mm	16	114	376
16x6-8 (150/75-8)	4.33R	*	*	1455	1120	in.	20/32	5.9	16.2
						mm	16	150	412
18x7-8 (180/70-8)	4.33R	*	*	2145	1650	in.	23/32	6.2	17.9
						mm	18	157	454
140/55-9	4.00E	*	*	1170	900	in.	18/32	5.1	14.9
						mm	14	130	379
6.00-9	4.00E	*	*	1885	1450	in.	30/32	5.4	20.6
						mm	24	138	523
21x8-9 (200/75-9)	6.00E	*	*	2755	2120	in.	34/32	7.4	20.4
						mm	27	187	517
6.50-10	5.00F	*	*	2340	1800	in.	38/32	6.4	22.3
						mm	30	162	566
23x9-10 (225/75-10)	6.50F	*	*	3445	2650	in.	35/32	8.0	23.0
						mm	28	204	583
200/50-10	6.50F	*	*	2470	1900	in.	25/32	7.5	18.1
						mm	20	191	461
7.00-12	5.00S	*	*	2920	2240	in.	38/32	6.8	25.7
						mm	30	172	652



Size	Rim	Type		Load Capacity (kg) Forklift up to 25 km/h		Unit	Tire Dimensions		
		Standard	Swift	Load Wheels	Steer Wheels		Tread Depth	Section Width	Overall Diameter
23x10-12 (250/60-12)	8.00G	*	*	3770	2900	in.	35/32	9.2	23.1
						mm	28	234	586
27x10-12 (250/75-12)	8.00G	*	*	3900	3000	in.	37/32	9.8	26.8
						mm	29	248	680
315/45-12	10.00G	*	*	4485	3450	in.	34/32	11.1	22.5
						mm	27	283	571
7.00-15	5.50	*	*	3545	2725	in.	37/32	7.0	28.7
						mm	29	178	729
7.50-15	6.50	*	*	3900	3000	in.	35/32	7.8	29.6
						mm	28	199	752
28x9-15 (8.15-15, 225/75-15)	7.00	*	*	3900	3000	in.	38/32	8.6	27.0
						mm	30	218	687
8.25-15	6.50	*	*	4750	3650	in.	44/32	8.3	32.0
						mm	35	212	813
250-15 (250/70-15)	7.00	*	*	4640	3570	in.	38/32	8.9	28.2
						mm	30	225	716
250-15 (250/70-15)	7.50	*	*	4640	3570	in.	38/32	8.9	28.2
						mm	30	225	716
300-15 (315/70-15)	8.00	*	*	5850	4500	in.	44/32	10.1	32.1
						mm	35	257	815
28x12.5-15	9.75	*	*	5525	4250	in.	38/32	11.3	28.1
						mm	30	287	713
350-15 (355/65-15)	9.75	*	*	7800	6000	in.	44/32	12.3	32.2
						mm	35	312	819
400/60-15	11.00	*	*	8970	6900	in.	42/32	13.0	32.2
						mm	33	330	818
355/50-20	10.00	*	*	8990	6915	in.	44/32	12.7	33.3
						mm	35	322	847
9.00-20	6.50	*	*	5400	4500	in.	45/32	9.3	38.7
						mm	36	236	984
9.00-20	7.00	*	*	5400	4500	in.	45/32	9.3	38.7
						mm	36	236	984
9.00-20	7.50	*	*	5400	4500	in.	45/32	9.3	38.7
						mm	36	236	984
10.00-20	7.00	*	*	6000	5000	in.	50/32	10.0	40.7
						mm	40	255	1035
10.00-20	7.50	*	*	6000	5000	in.	50/32	10.0	40.7
						mm	40	255	1035
10.00-20	8.00E	*	*	6000	5000	in.	50/32	10.0	40.7
						mm	40	255	1035
12.00-20	8.00E	*	*	7650	6300	in.	57/32	11.3	42.8
						mm	45	287	1087
12.00-20	8.50E	*	*	7650	6300	in.	57/32	11.3	42.8
						mm	45	287	1087